

CITY OF CONCORD, NEW HAMPSHIRE
ARCHITECTURAL DESIGN GUIDELINES



Adopted By:

City of Concord Planning Board

August 29, 1990

Revised: April 12, 1991

CITY OF CONCORD, NEW HAMPSHIRE
ARCHITECTURAL DESIGN GUIDELINES

CONSULTANT

Architects Design Alliance, Inc.
105 North State Street
Concord, NH 03302-0291

ILLUSTRATIONS

Christopher F. Kronser

PHOTOGRAPHS

City of Concord Planning Department
Christopher F. Kronser



TABLE OF CONTENTS

PAGE

1.	INTRODUCTION	3
	1.1 CITY DEVELOPMENT	3
	1.2 DESIGN TRADITION	4
	1.3 DESIGN REVIEW HISTORY	5
2.	PURPOSE AND OBJECTIVES	6
3.	APPLICABILITY AND AUTHORIZATION	7
4.	FACTORS FOR EVALUATION	8
5.	GENERAL APPEARANCE CRITERIA	9
	5.1 SITE DEVELOPMENT	9
	A. Site Organization	
	B. Setback From Street	
	C. Building Alignment	
	D. Building Spacing	
	E. Building Siting	
	F. Visual Continuity	
	5.2 LANDSCAPE AND SITE TREATMENT	13
	A. Existing Conditions	
	B. Pedestrian Circulation	
	C. Plantings	
	D. Plant Material Sizes	
	E. Screening	
	F. Landscape Accent Material	
	G. Parking	
	H. Site Structures	
	I. Views	
	5.3 BUILDING DESIGN AND MATERIALS	17
	A. Scale and Proportion	
	B. Vertical or Horizontal Emphasis	
	C. Roof Form	
	D. Architectural Features and Details	
	E. Materials and Colors	
	F. Mechanical Equipment	


TABLE OF CONTENTS - Continued	<u>PAGE #</u>
5.4 SIGNAGE	21
A. Scale and Proportion	
B. Materials	
C. Illumination	
D. Coordination	
E. Logos and Graphics	
5.5 CASE STUDY	23
A. Typical Shopping Complex	
6. SPECIAL DISTRICT STANDARDS	24
6.1 GATEWAY BUSINESS (BF)	24
A. Natural Environment	
B. Buffers	
C. Vehicular and Pedestrian Access	
D. Landscaping and Parking	
E. Signage	
F. Building Features	
G. Acceptable Materials	
H. Flags	
6.2 SUBURBAN DEVELOPMENT (SD) OVERLAY DISTRICT	31
A. Screens and Buffers	
B. Vehicular and Pedestrian Circulation	
C. Landscaping	
D. Signage	
E. Building Features and Materials	
F. Utilities and Lighting	
6.3 RESERVED	

1. INTRODUCTION

The planning for the City of Concord's civic and institutional architecture has always been a part of the community's cultural tradition. The settlers who established Concord along the bend in the Merrimack River in the early 1700's developed a master plan for their settlement. As this process evolved, ordinances and regulations for private development were introduced and updated to ensure that rational and harmonious development would continue as an important feature of the City of Concord.

1.1 CITY DEVELOPMENT


The unique characteristics of being both a city with a strong historic character and a state capital required that architectural and planning standards be established for the community. The location and relationship between government complexes and business enterprises will be guided by these standards. Maintaining Concord's architectural character is important to local citizens because of their continuing tradition of financial and political involvement in civic development.

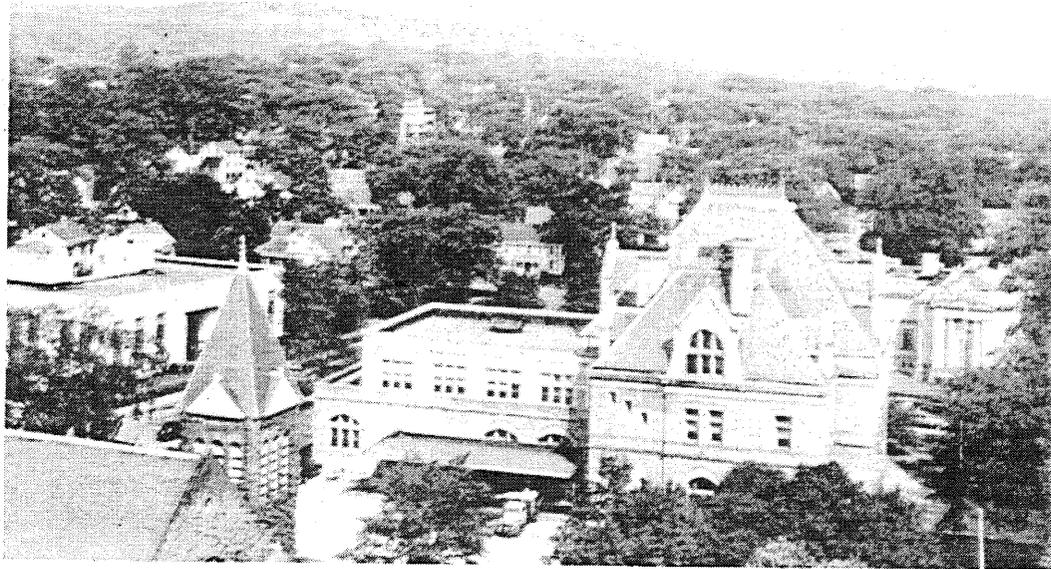

Northern view of Concord

1.2 DESIGN TRADITION

The City's first master plan was created in 1726 and became the initial action in developing the urban design tradition of Concord. Historic buildings within the central civic complex were financed by local residents and built by local stonecutters and craftsmen using indigenous material such as brick and granite. This combination of public interest and local pride in Concord's built environment continues today.

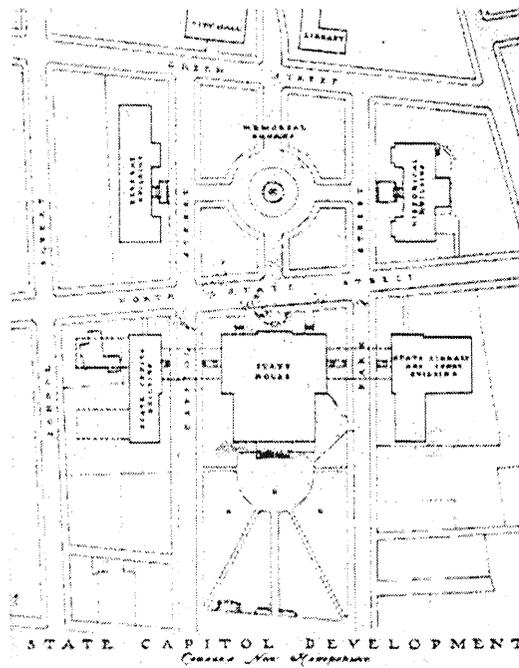

Proposed 1930's plan by Gov. Winant

The State House complex and Concord's central business district evolved during the 19th century railroad era. The special character and quality of the main street became a crucial issue of the 1970's revitalization and has been protected and enhanced through sensitive development. This architectural evolution is also evident in the surrounding residential areas and commercial districts.




Antique postcard

1.3 DESIGN REVIEW HISTORY

Issues involving harmonious building relationships and compatibility of architecture were first addressed by City officials in the 1930's. Concord adopted its original requirements in 1967 for review of buildings within the State House area. The scope of architectural design review was expanded in 1977 to ensure that new buildings in certain districts would be consistent with the City's 19th century architecture.

At present, designated areas of the City require design approval before issuance of a building permit. Applicable projects are first reviewed by the Planning Board's Design Review Committee. The Committee's comments are given to the Planning Board for consideration as part of its final action on development applications.

The increased municipal participation in design matters will ensure the continuation of Concord's design tradition in future development. Local zoning regulations affecting design review are being made more rigorous and special districts, such as the Gateway District, have recently been developed to protect Concord's heritage and architectural appearance.

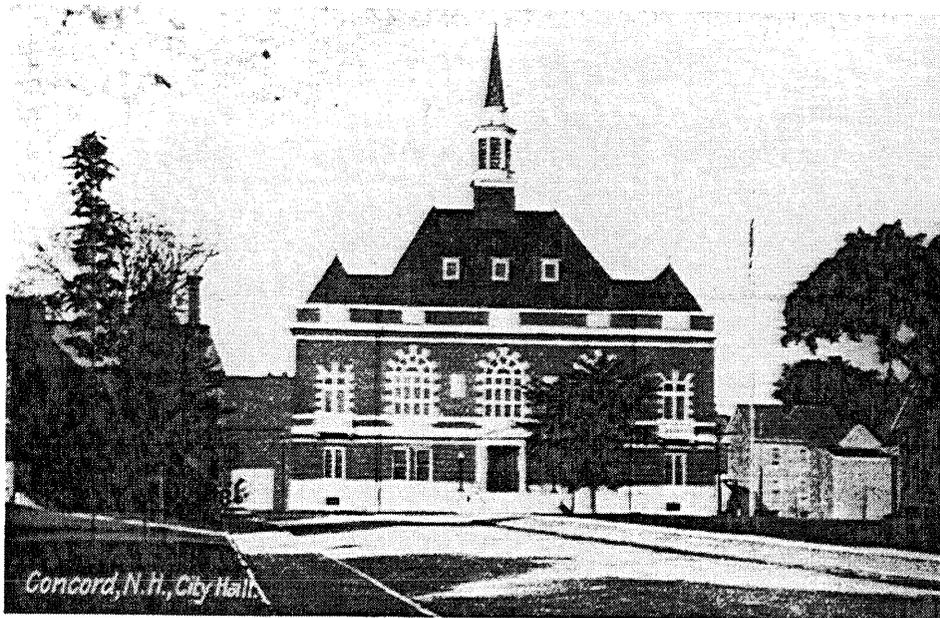


Antique postcard

2. PURPOSE AND OBJECTIVES

The Architectural Design Guidelines will provide written and graphic criteria for the appearance of all new development subject to design review. They are established to inform applicants of the expectations for the architectural appearance and site development of new and renovation projects. The guidelines are developed specifically for Concord with the input of various Planning Department officials, local architectural professionals and the general public. These guidelines will be periodically updated to reflect the evolution of the City's architectural character.

The Guidelines' flexibility will encourage and guide new development in a manner that will preserve the architectural heritage of the City of Concord. The Planning Board and Design Review Committee will use this criteria as a basis for accepting or rejecting the appearance of development projects. This will ensure that the high quality design tradition of Concord is continued in future development.

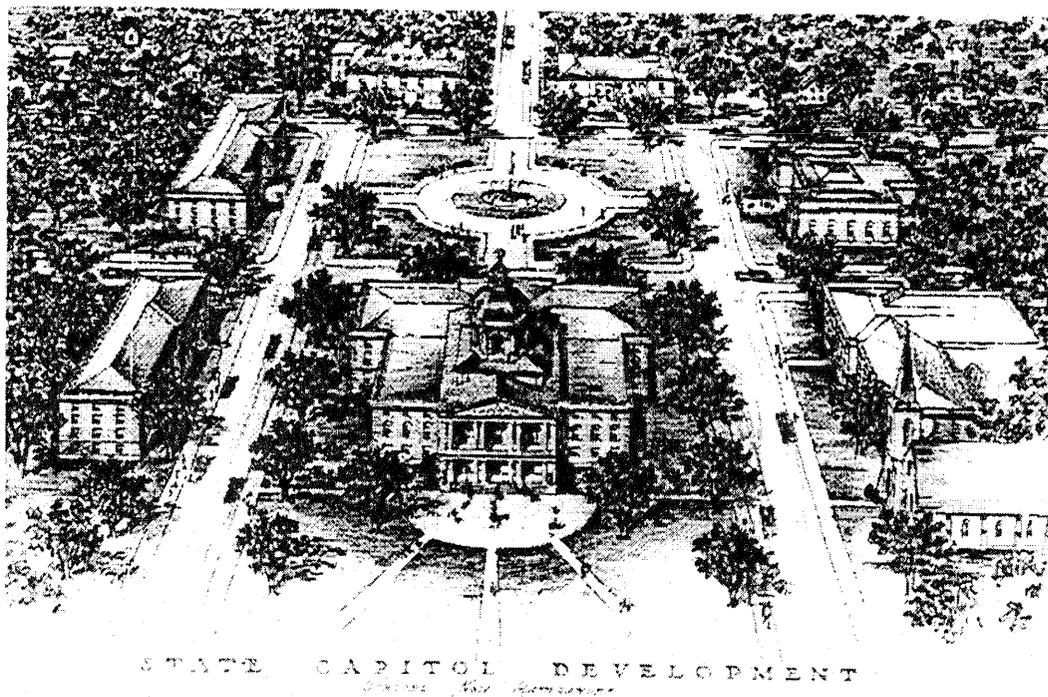

Proposed 1930's plan by Gov. Winant

3. APPLICABILITY AND AUTHORIZATION

In applying these guidelines, the City of Concord will enhance and preserve taxable values and promote the public health, welfare and safety. The Architectural Design Guidelines are created to implement Section 28-11-4 of the City of Concord Zoning Ordinance and are adopted as part of the Site Plan Review Guidelines pursuant to RSA 674.44.

The guidelines apply to the following types of development and zoning districts:

<u>Type</u>	<u>Zoning Ordinance Article/Section</u>
Multi-Family Dwelling Conversions	Section 28-06-24(b)
Planned Unit Development	Section 28-08
Attached and Multi-Family Dwellings	Section 28-09
Large Scale Development	Section 28-10
Architectural Design (AD) District	Section 28-11-4
Historic Zone (HI) District	Section 28-11-5
Redevelopment (RDV) District	Section 28-11-7
Gateway (BF) District	Section 28-11-10
Suburban Development (SD) Overlay District	Section 28-11-11
Signs	Section 28-13-1

Special design districts and their associated standards will be established and described in future sections of the Design Guidelines.



Concord's main street in 1990

4. FACTORS FOR EVALUATION

The evaluation of the following factors will govern the Design Review Committee's commentary to the Planning Board on a submitted project's appearance. The Planning Board will consider these comments when deciding on a final approval or denial of a submission. The Planning Board is the final authority for all districts except the Historic District (Zone HI), in which the Historic District Commission will have final approval.

Appearance factors to be considered are:

- a. Conformance to general appearance criteria.
- b. Conformance to general appearance criteria for special design districts.
- c. Architectural character of the buildings.
- d. Material and color selections.
- e. Vehicular and pedestrian circulation.
- f. Harmony and compatibility.
- g. Integration of landscaping and overall signage.
- h. Retention, alteration or removal of existing structures and site features.

A critical element of the review process will be the evaluation of how well the new development fits within the existing site and neighborhood. The applicant should submit photos of the surrounding structures and a site analysis of the existing conditions as part of the material for review. The analysis should indicate existing natural and man-made features of the site, potential views, micro-climate, etc.

5. GENERAL APPEARANCE CRITERIA

5.1 SITE DEVELOPMENT


The development of site must address various elements in providing a design solution for a given building project. The building's orientation, setback, alignment with the street and relative spacing with other structures will be considered in the overall design. The reuse of existing structures and landscape features is encouraged and an overall architectural theme for the site development will create a positive image for the project.

A. Site Organization

All existing natural and man-made features of the site should be carefully considered for integration into the overall site design. These features should enhance and preserve the best portions of the environment. An overall theme or concept for the development will help organize a site and maximize the benefit of these site elements.

The developer should plan land development which responds to the surface flow of water and is in harmony with the existing site contours. This will require less regrading of the site and reduce erosion problems.

It is important to cluster buildings within a development wherever feasible. A compact building arrangement provides savings in grading, paving, utilities and other costs and conserves natural site features and open space.

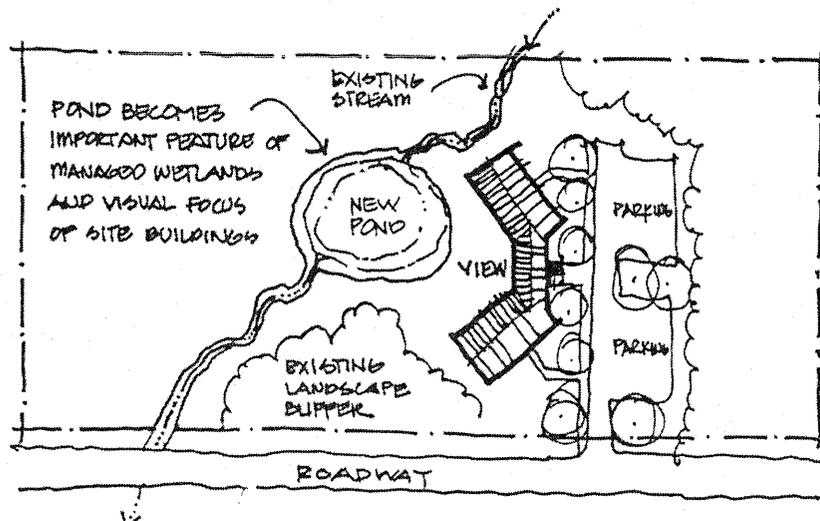


Separation of vehicular and pedestrian pathways is important to the overall safety and organization of a site. Walkways with landscaped borders and parking lot buffers can act as directional elements and provide the opportunity for natural and landscaped elements to be experienced by the pedestrian as they approach the complex.

B. Setback From Street

Each zoning district has specified setback requirements from the property lines. These setbacks are usually in response to the overall prevailing setback for the district. New construction should have setbacks which match the average setbacks of existing adjacent structures where possible. This will allow for the continuation of a given pattern in a particular district.

The front yard setbacks will not be as crucial to maintain in districts where there is not a uniform building setback. Other features such as zoning requirements, irregular topography, wetlands and preservation of positive natural features should be considered in establishing the final location of the structures.

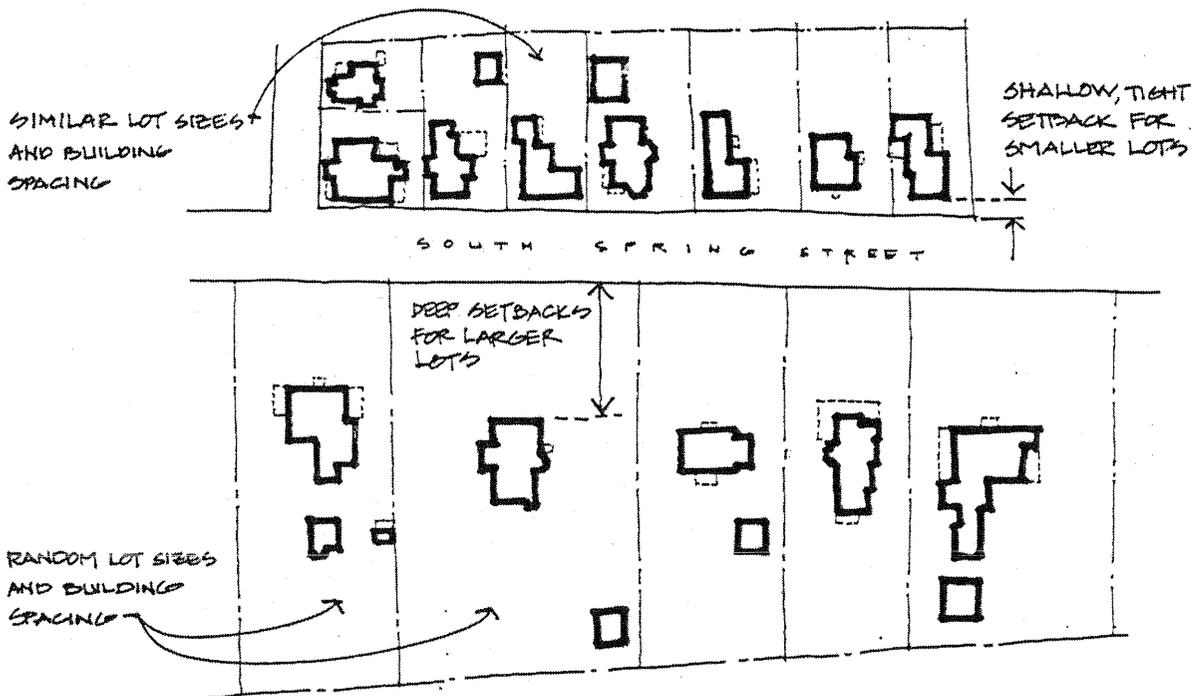

C. Building Alignment



Existing buildings will often have a perpendicular or parallel alignment with the street. When a new development is in close proximity to existing structures, the new buildings should reflect the existing alignment. The existing building alignments relative to the street, may have resulted from natural topography, water ways, climate or the preferred alignment of a particular architectural style.

D. Building Spacing

The space between new and existing buildings is important in determining the rhythm and sense of enclosure along an existing street. The characteristics of prevailing spacing, either uniform or random, should be maintained in siting the new structures.

E. Building Siting

The building(s) placement and arrangement within a large scale site or at an isolated location should respond to the site development criteria. The site features and their corresponding building relationships will have a major influence on the character of the new development.

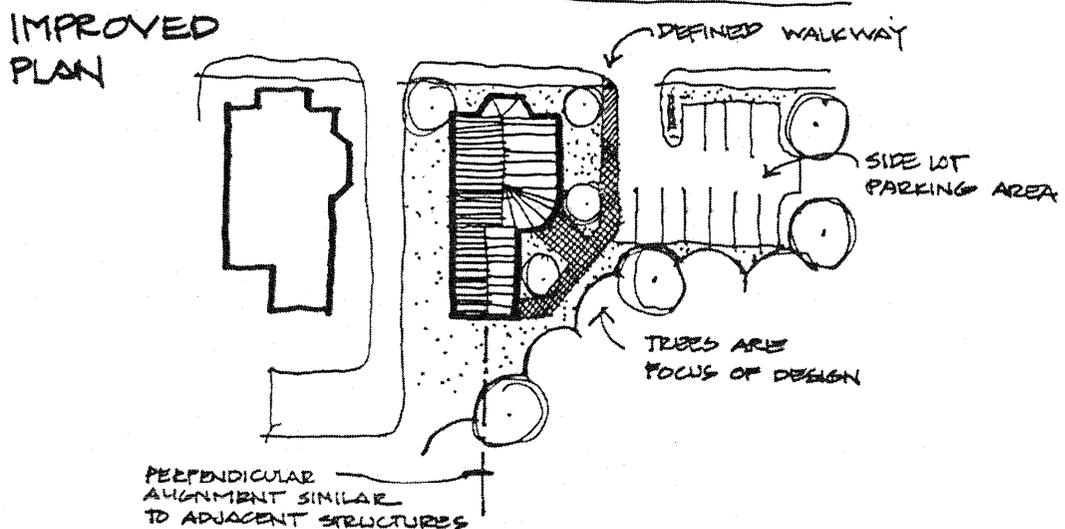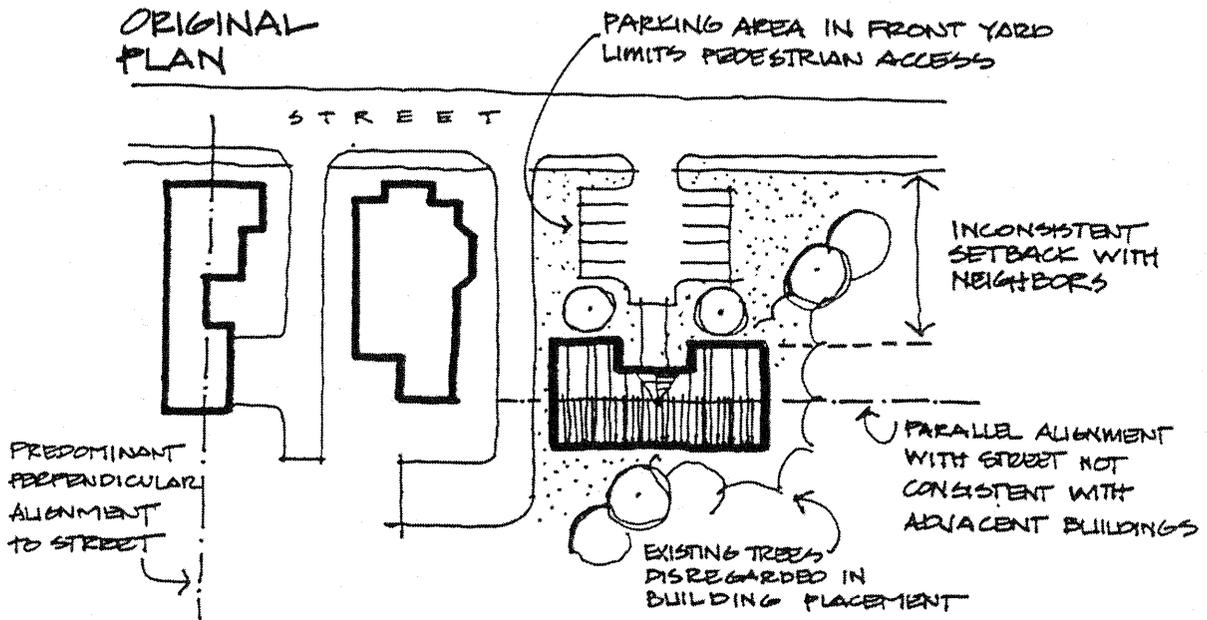

F. Visual Continuity

A new site development can blend with the existing neighborhood by utilizing similar fences, tree placements, similar plantings and walkways. This will give a feeling of continuity to the overall district and is important where adjacent structures are in close proximity to the new development.



SIMILAR LANDSCAPE GROUPINGS

GRANITE CURBING PROVIDES COMMON STREET EDGE TREATMENT FOR FRONT YARD AREAS

SIMILAR SIGNS AND PLACEMENT


5.2 LANDSCAPE AND SITE TREATMENT

All landscaping materials should be of a quality that will enhance the environment and serve as a functional part of the development. Trees should provide shade and have interesting character and color as they grow. Shrubs or ground cover should also include interesting colors and textures while providing screening in required areas and highlighting the architecture of the development. The use of evergreen materials are recommended for an all-season landscaping effect.

A. Existing Conditions

Unique or outstanding landscape features on a site should be preserved. Existing plant material should be incorporated into the new landscape plan where possible. Specimen trees and shrubs should be relocated on the site for a more mature landscaping effect.

It is important to preserve the existing ground covers which serve as water absorbers and act as soil stabilizers for erosion control. The site designer should plan land development which responds to the surface flow of water and is in harmony with the site contours. This careful planning will minimize erosion problems by reducing the amount of site regrading, ground cover disruption and existing plant replacement.

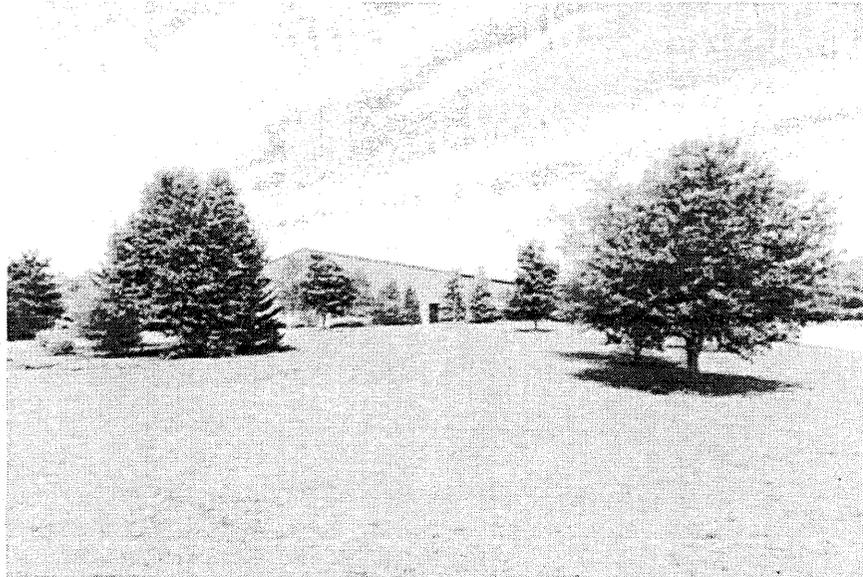


5.2 LANDSCAPE AND SITE TREATMENT

All landscaping materials should be of a quality that will enhance the environment and serve as a functional part of the development. Trees should provide shade and have interesting character and color as they grow. Shrubs or ground cover should also include interesting colors and textures while providing screening in required areas and highlighting the architecture of the development. The use of evergreen materials are recommended for an all-season landscaping effect.

A. Existing Conditions

Unique or outstanding landscape features on a site should be preserved. Existing plant material should be incorporated into the new landscape plan where possible. Specimen trees and shrubs should be relocated on the site for a more mature landscaping effect.

It is important to preserve the existing ground covers which serve as water absorbers and act as soil stabilizers for erosion control. The site designer should plan land development which responds to the surface flow of water and is in harmony with the site contours. This careful planning will minimize erosion problems by reducing the amount of site regrading, ground cover disruption and existing plant replacement.

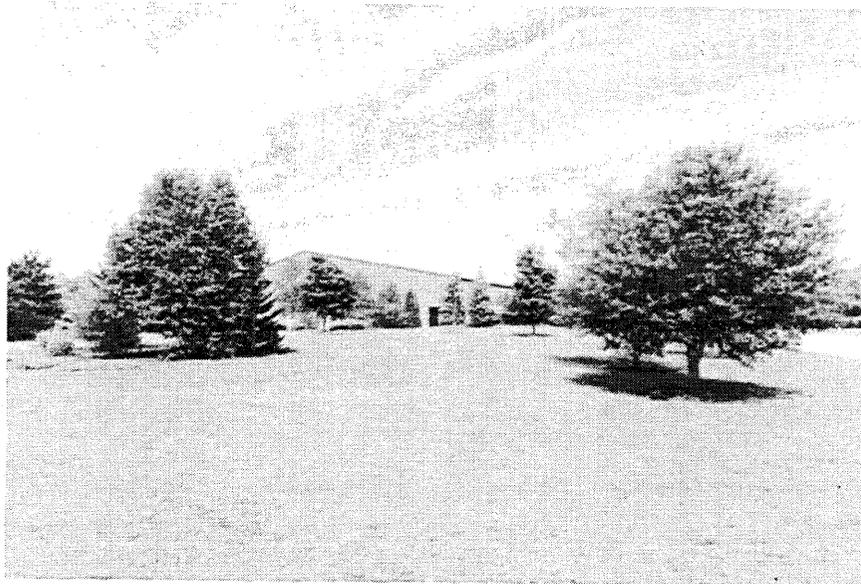

B. Pedestrian Circulation

Pedestrian pathways between parking areas and the buildings should be provided for a safe transition between buildings and vehicular areas. These pathways could be designated with different materials, curbing or landscaping.

C. Plantings

Plant materials should be selected for type, size and quality on the basis of suitability for the setting and climate. Plants should be tolerant to the area's climate and specific site conditions, hardy and properly sized for the design and compatible with the other development's planting character and functions. A ratio of 1/3 to 2/3 mix of evergreen and deciduous materials is a common landscape standard.

D. Plant Material Sizes

Deciduous and evergreen trees should be sized to reflect the scale of a project. Larger buildings and expansive areas will require larger plantings for optimum effect. Shrubs should be a minimum of three feet in height when used as a hedge and four to six feet in height if used as an ornamental planting.

The use of grass areas, ground cover plantings and flower beds are encouraged to create color, texture and interest in the overall landscape concept. Grass areas adjacent to buildings and high visibility areas can have an immediate effect through the use of sod. Other grass products are available for providing cover within a short time period.




E. Screening

Screening should be provided for service yards, trash receptacles, storage areas, utility equipment and other similar accessory structures and uses. Walls, fencing, berms and planting, or a combination of these screening materials, can accomplish an effective all-season enclosure.

F. Landscape Accent Material

Mulch materials should be a small size select stone, shredded bark or other organic material best suited for the site. Edging should be used to separate grass areas from shrubs, ground cover and mulch and can be a cut bed edge or a durable material which is securely fastened and retains the landscape material.

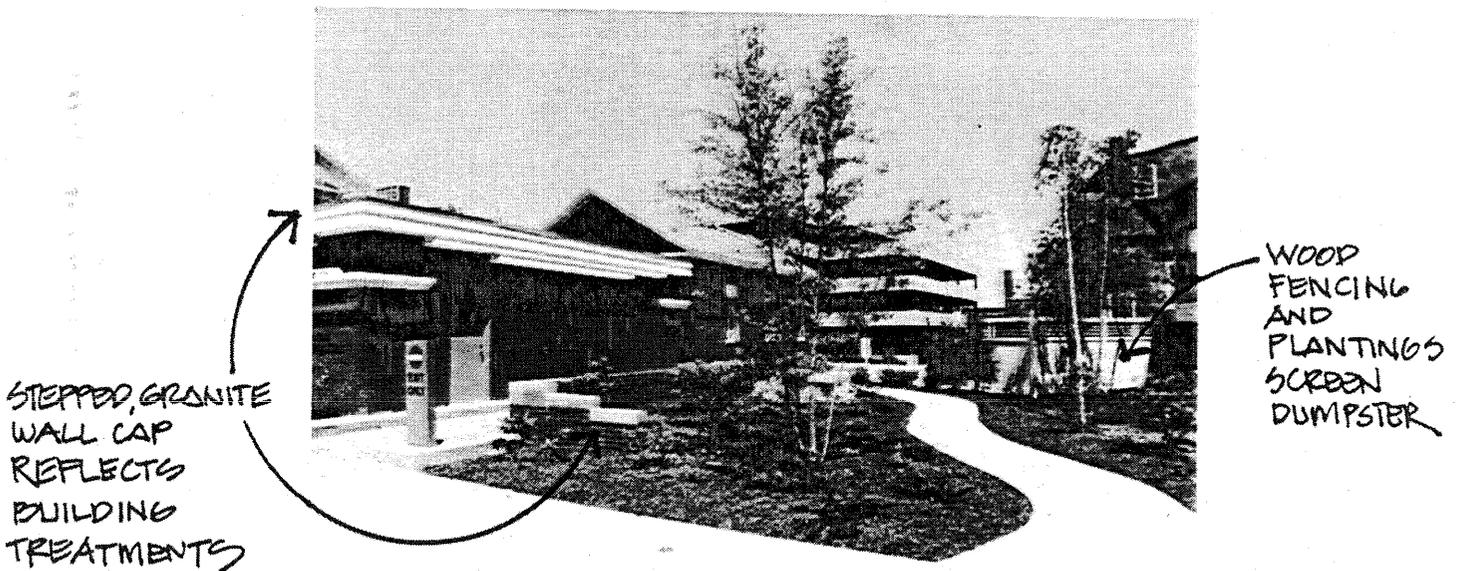

G. Parking

Parking should be located to the side or rear yard areas where possible. Landscaped areas containing tree groupings shall be utilized per the City's Zoning Ordinance, Section 28-12-5 for parking areas. A guide for parking lot design is available from the Concord Planning Department. Planting areas susceptible to injury shall be protected by the use of curbing, berms or tree guards.

H. Site Structures

Accessory buildings, storage enclosures, benches, tables, etc. should be in character with the building architecture and surrounding landscaping. This is typically accomplished through the use of common forms and materials. The scale and design of these elements should be consistent with the overall project. Lighting standards should be of a size and design which are compatible with the buildings and the adjacent area. Light sources should be shielded at all perimeter areas to reduce light glare on to adjacent properties.

I. Views

Scenic views from a site or public vistas through a project should be protected and enhanced where possible within the overall site development.




5.3 BUILDING DESIGN AND MATERIALS

During the design process, the designer recognizes the basic elements of natural forms and man-made space, understands how they can be manipulated in the development of a design concept, and visualizes the final design solution. The building is basically a response to an existing set of conditions. These conditions include the site, its existing context, the proposed building type(s) and owner requirements.

In all cases, the design solution should have elements and systems which are interrelated, interdependent and mutually reinforcing to form an integrated design. The building complex is created of elements and systems which are related among themselves and create order for the use of the site and building(s). This order relates to the building itself and to the adjacent property and developments. The architectural review will be an evaluation of the building's form, appearance and function to ensure that this order is maintained and that the project is appropriate for the site and compatible with the adjoining buildings.

A. Scale and Proportion

The intent of all theories of proportion is to create a sense of order among the elements in a visual composition. A proportion system establishes a consistent set of visual relationships between the parts of a building. This visual order can be sensed and should be compatible with neighboring developments. New buildings should not exceed the average height of existing adjacent buildings, although greater distances between buildings may allow larger differences in height.

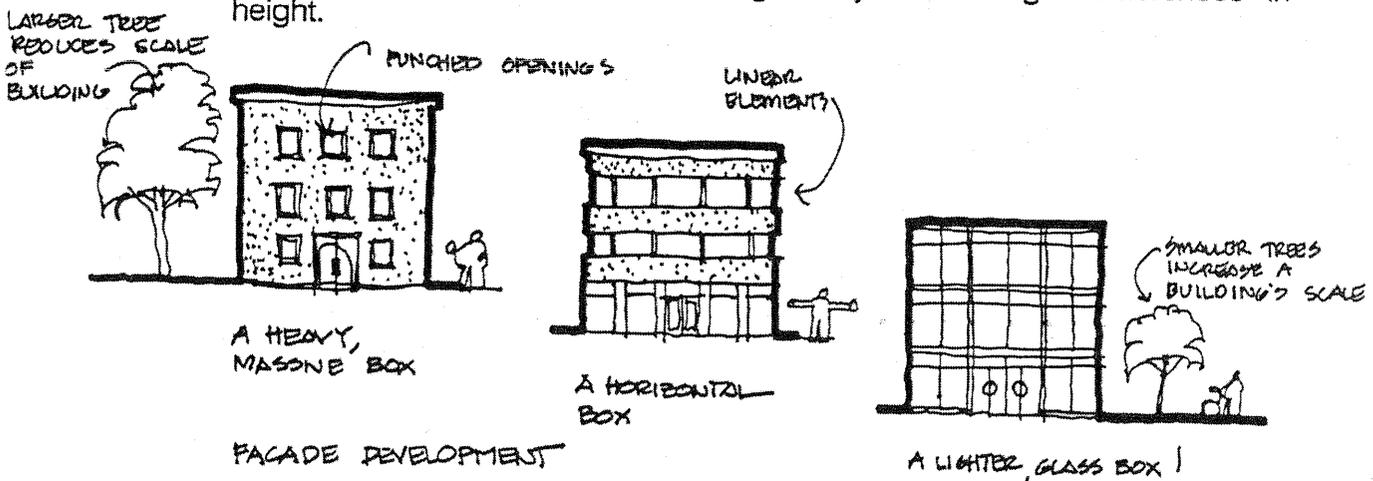

The size and proportion of windows and wall openings in a building facade are usually related to one another and the spaces between them within the overall development of the facade. The organization and placement of the openings and their relative sizes can create various degrees of scale for a building design. The window and wall openings should be in similar proportions to existing structures when they are in close proximity to the site development.

B. Vertical or Horizontal Emphasis.


Relate the vertical, horizontal or nondirectional facade characteristics of new buildings to the predominant directional expression of nearby buildings. This emphasis is created by the proportions, scale and the arrangement of the structure's door and window openings.

HORIZONTAL SIGN
BAND EXTENDS
OVER VARIOUS
VERTICAL
BUILDINGS



1978

NEW MANSARD
ROOF OF INALL
STRUCTURE
RELATES TO
ADJACENT
BUILDINGS IN
HEIGHT AND
FORM

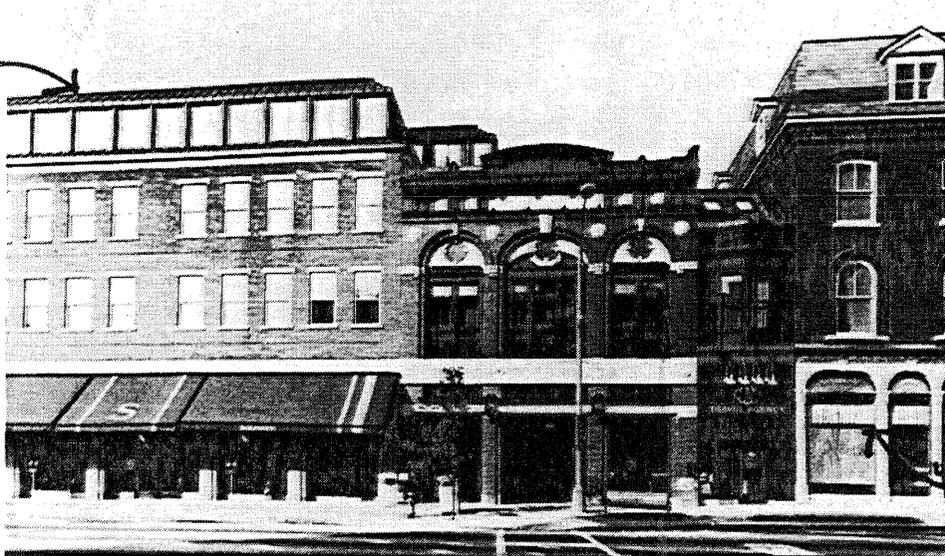

NEW ARCHED
STOREFRONT
RESPONDS TO
ORIGINAL
VERTICAL
DESIGN

1988

C. Roof Form

The roof plane is a building's prime sheltering element and the form is determined by the geometry and materials of its structure. As a visual design element, the roof plane is the building's hat and can have a significant impact on a building's form and silhouette. New roof forms should relate to the roof forms of adjacent structures where appropriate by duplicating the shape, pitch and materials.

D. Architectural Features and Details


Any features and details such as balconies, decks, covered porches, columns, towers, skylights and arches should be in proportion with the building. Accurate restoration of existing detail is encouraged but use of historical details on contemporary structures should be included only where they are appropriate to the overall design.



OFFICE ADDITION
REPEATS
IMPORTANT
BUILDING FEATURES



E. Materials and Colors

The exteriors of buildings should utilize materials appropriate for the character of the building and compatible with significant adjacent structures. All exterior surfaces visible to the public should be covered with a siding material and long-term maintenance characteristics of all materials should be considered during the selection process. The side and rear building elevations should incorporate the materials, design details and theme when exposed to public view.

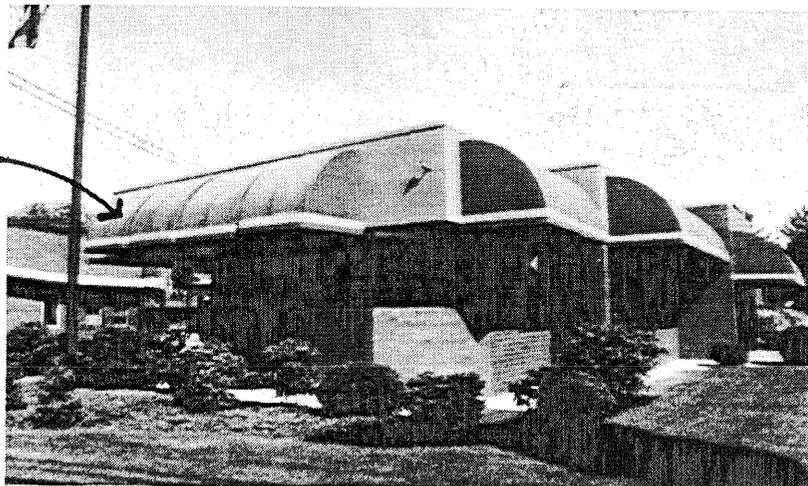

BRIGHTLY COLORED
AWNINGS ADD
DETAIL AND A
CHANGE IN
TEXTURE FOR
THE SIMPLE
BRICK STRUCTURE

Subtle colors should be used on larger and very plain buildings while smaller buildings with elaborate detailing can use more colors. Colors that are disharmonious with other colors used on the building or found on adjacent structures should be avoided. Paint colors should relate to natural material colors found on the building such as brick, terra-cotta, stone or ceramic tile and existing elements such as signs or awnings. Contrasting colors, which accent architectural details and entrances, are encouraged.

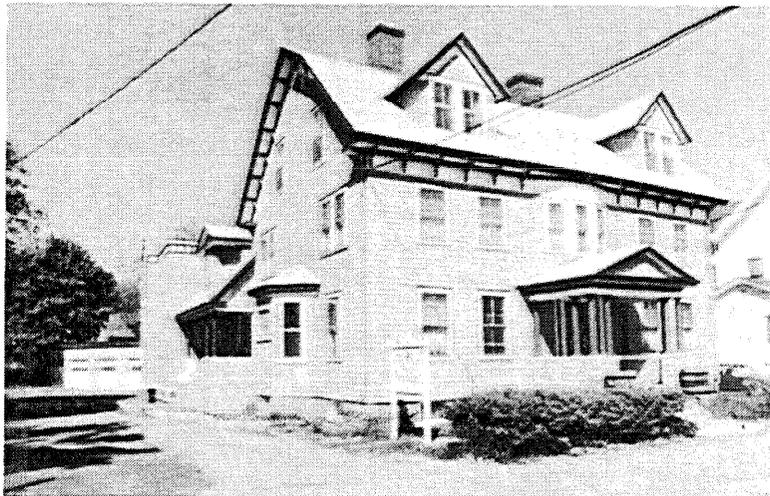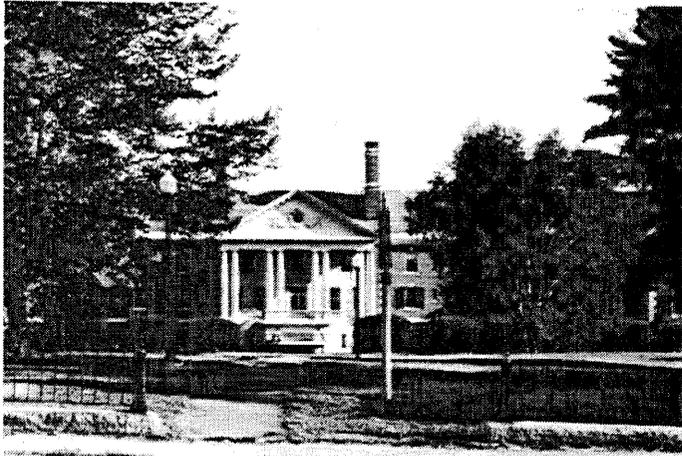

F. Mechanical Equipment.

All roof-top mechanical equipment should be screened from view with either building walls or roof forms. All sides visible to the public should have this screening material.

5.4 SIGNAGE

Signs should be visible and legible through the use of appropriate details and proper locations. Allowable sign areas and locations per district are explained in Article 28-13, Signs, of the City of Concord Zoning Ordinance. The following design guidelines will give examples and methods of adding interest and quality to a building project while enhancing the overall development.

A. Scale and Proportion

Every sign should be an integral, subordinate element within the overall building and site design. The scale and proportion of the signage shall not overpower the building or obscure the building's architectural features.




B. Materials

Sign materials should harmonize with the building's design. A simple and direct message, with upper and lower case letters, is most effective. A limited number of colors should be used with light colored letters placed on a matte, dark background which reduces reflected glare.



C. Illumination

Illumination of signs should be from an indirect light source to reduce glare and ensure attention is focused on the sign. The light should be contained within the sign frame and not spill over to other portions of the building. Internally lit signs should provide opaque backgrounds with translucent letters.

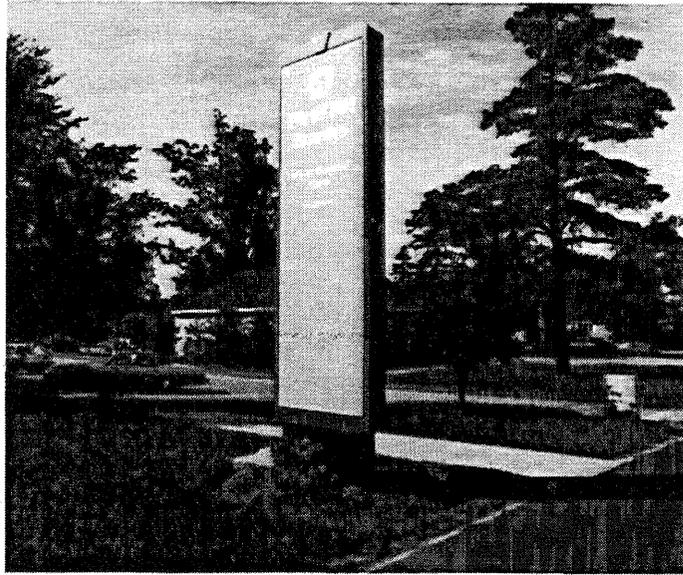


D. Coordination

All signage within a building complex should be coordinated by using similar materials, letter styles, colors and overall sign sizes to ensure sign continuity and a uniform appearance throughout the development.


E. Logos and Graphics

Company logo's should be incorporated into the overall sign and not become the sign itself.

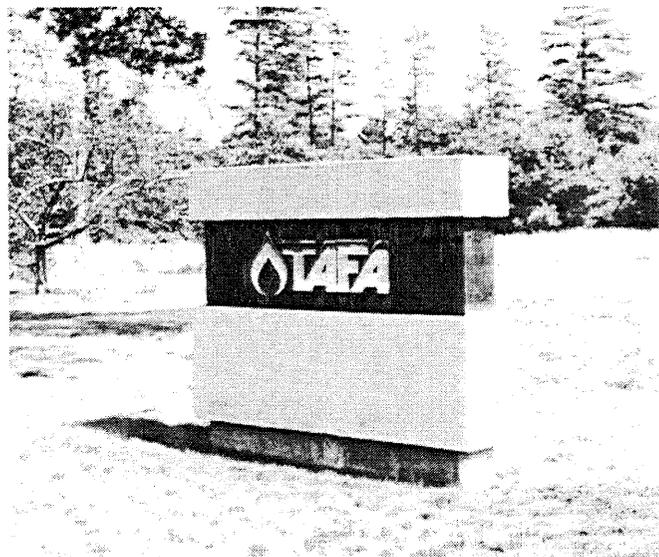


5.5 CASE STUDY

A. Typical Shopping Complex

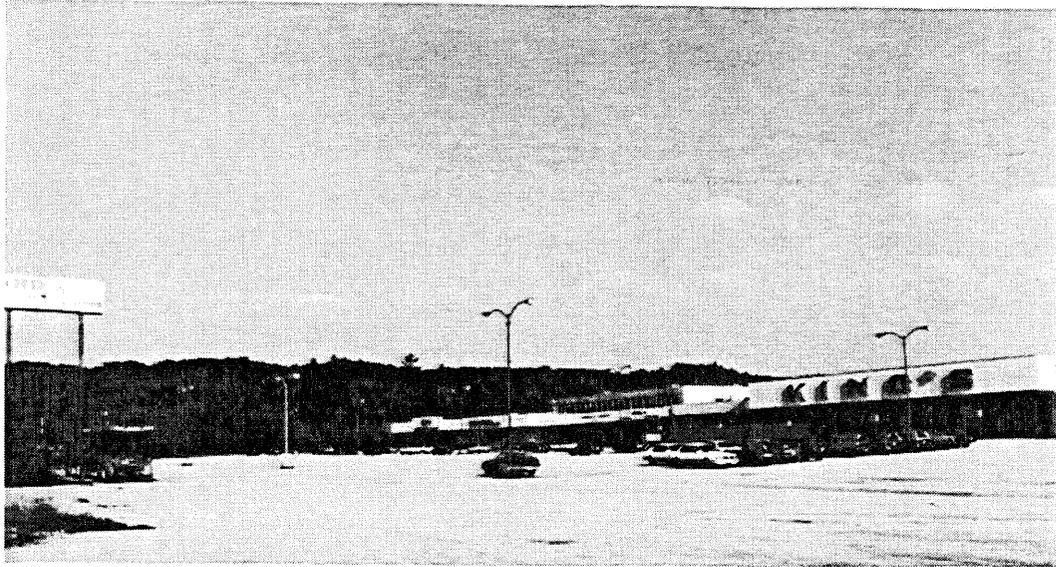

BEFORE GUIDELINES

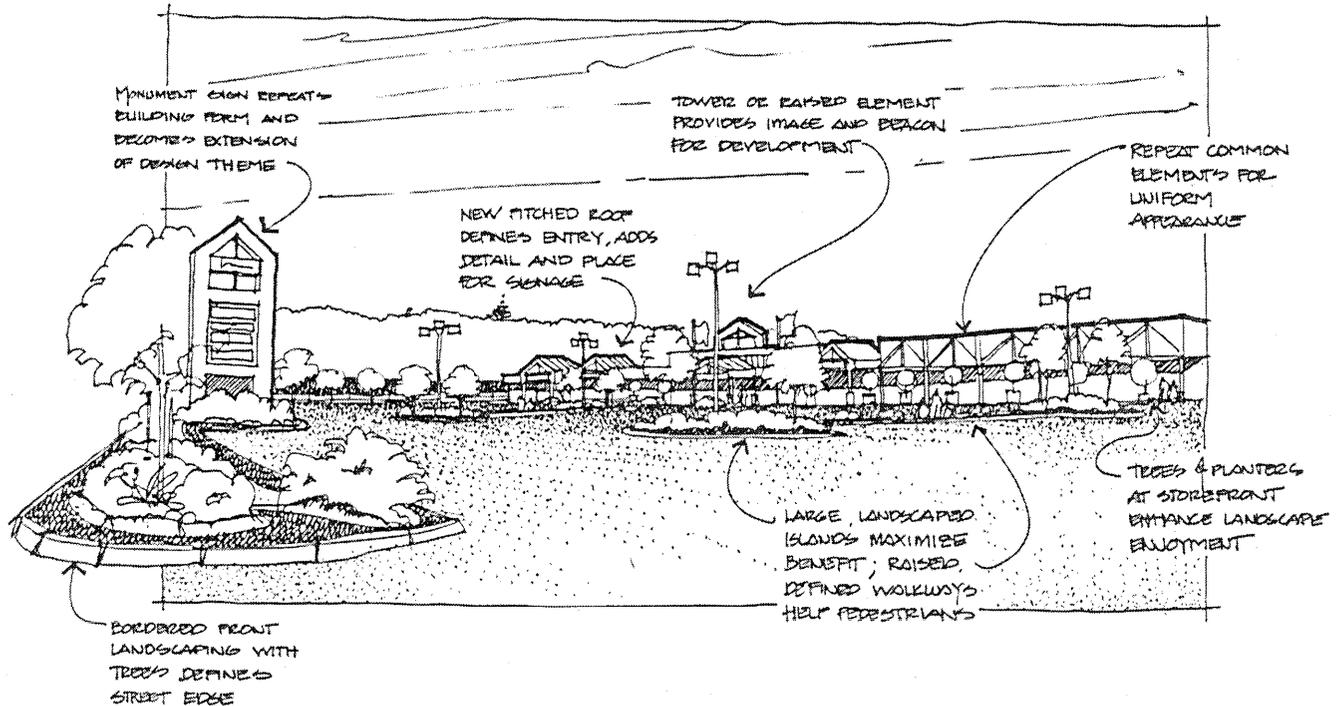

AFTER GUIDELINES

6. SPECIAL DISTRICT APPEARANCE STANDARDS

The appearance criteria will be expanded to include additional criteria for special districts as they are added to the City of Concord Zoning Ordinance. These standards will be in addition to the general appearance criteria which also apply to these new districts.

6.1 GATEWAY COMMERCIAL (BF) DISTRICT


The BF District will allow for high quality commercial development along major highway corridors within the City. This development should be compatible with the natural environment, provide buffers for surrounding residential areas, coordinate vehicular and pedestrian access for safe and efficient travelways, increase roadside landscape areas, coordinate signage and reflect Concord's architectural heritage.

A. Natural Environment


Existing natural environmental features shall be incorporated into the overall site design. Environmental standards are established within the Zoning Ordinance for protection of these features, i.e. rivers, streams, wetlands, steep slopes and bluffs.

B. Buffers

Screening and buffers for different building functions are established within the Zoning Ordinance. Screening shall be in harmony with the building form and colors. A combination of landscaping and decorative fencing or berming shall provide noise and visual barriers for adjacent residential districts. Noise levels for operations shall be per the Municipal Code, Title 1, General Code, Article 13-6 Noise.

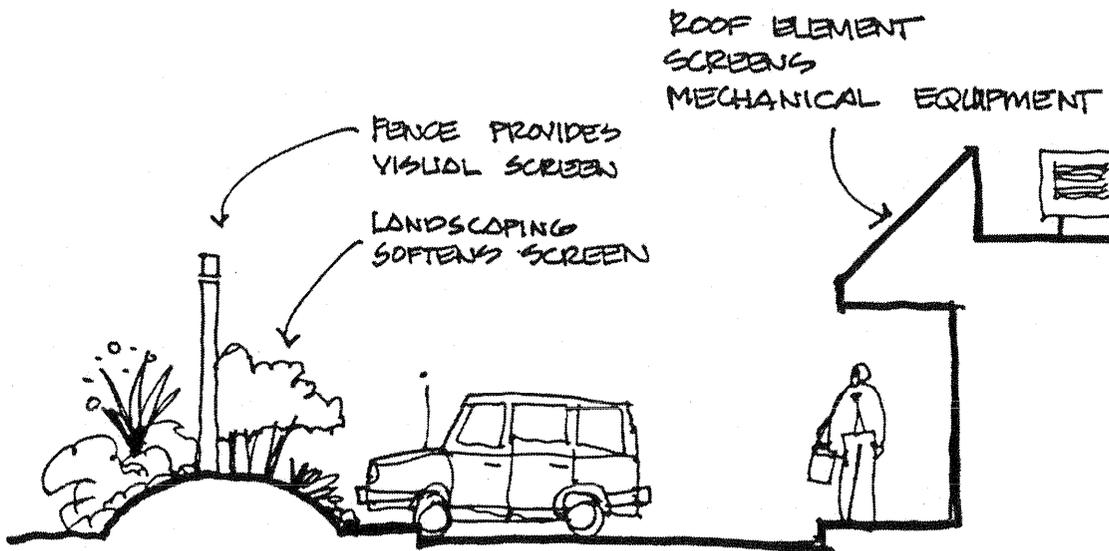

Landscape buffers adjacent to residential properties should consist of an evergreen hedge or combination of solid fencing and landscape materials. In locating the fencing and landscape hedge, the designer shall consider the snow storage areas and encroachment of car bumpers. Berms of 2 ft. minimum height are encouraged in larger planting areas and should have a maximum slope of 3 to 1. Stone walls or granite curbing are recommended for raised planting areas, boundary areas or retaining walls.

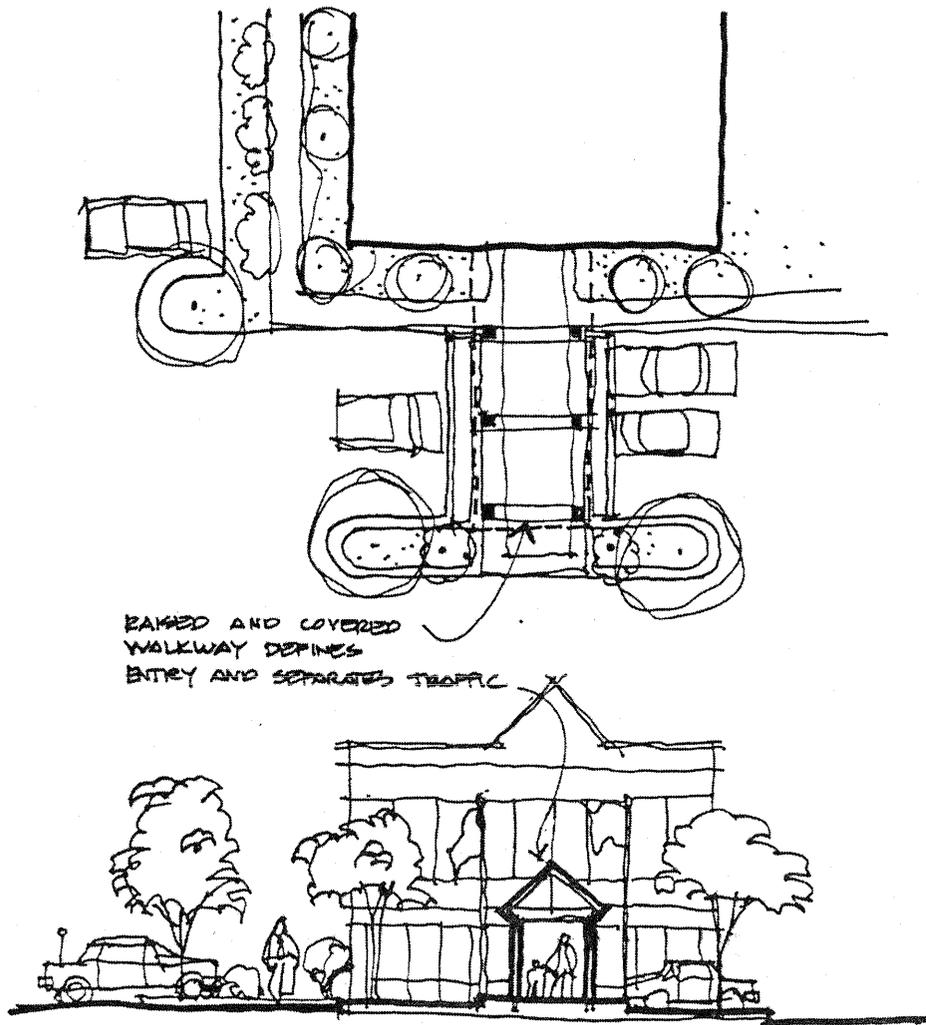

C. Vehicular and Pedestrian Access


An interconnected and cohesive circulation plan is desirable for ease of on-site vehicular and pedestrian movement. Consideration should be given for slightly raised or covered walkways for connecting major parking areas to buildings. This articulation of major walkways will allow for separation between the automobile and pedestrian traffic.

D. Landscaping and Parking

Parking areas should be located to the side or rear of new buildings which will allow for a visually close relationship of the structure to the street. The building can then become a display for the occupant with windows facing both the roadway and the parking lot. The streetside landscaped area shall have a minimum number of trees based on a formula of one tree per 35 lineal feet of roadway. The location and sizing of these trees is flexible and grouping arrangements are encouraged where possible.

Landscaping will be scaled in relationship to the overall project. Buildings exceeding 10,000 sq. ft. and/or two stories in height shall require larger plantings and parking lot landscaping shall be raised and grouped around islands with a minimum 9 ft. dimension in any direction. This will allow for the maximum impact of the landscaping and provide shading and other benefits for the pedestrian.


Natural surroundings which are maintained as part of the development shall be reinforced with a type of natural plant species indigenous to the area. Larger planting areas shall incorporate a lawn area for a more formal appearance within the district. Mulching shall be limited to the actual shrub and tree planting areas.

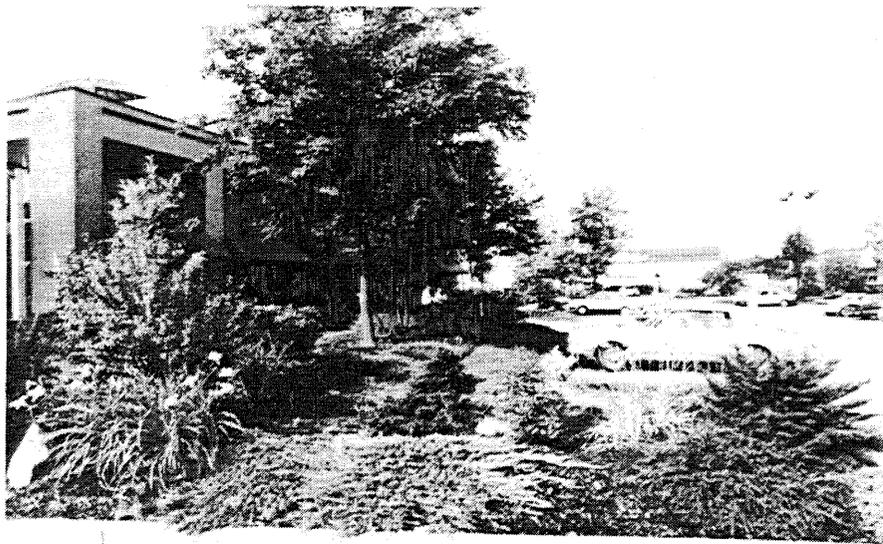

E. Signage

All free-standing signs shall be a monument type in a planter setting with uniform designs and setbacks. One square foot of planter area shall be provided for each one square foot of sign area and grouped around the base of the sign. The landscaping and planter shall not be measured as a part of the sign area requirements.

An overall identification sign shall contain the name or trademark of the business, building or building complex which it identifies. Signs containing names of individual tenants shall have a ten sq. ft. maximum individual panel size. Reader boards or variable message signs are not desirable except for time and temperature information.



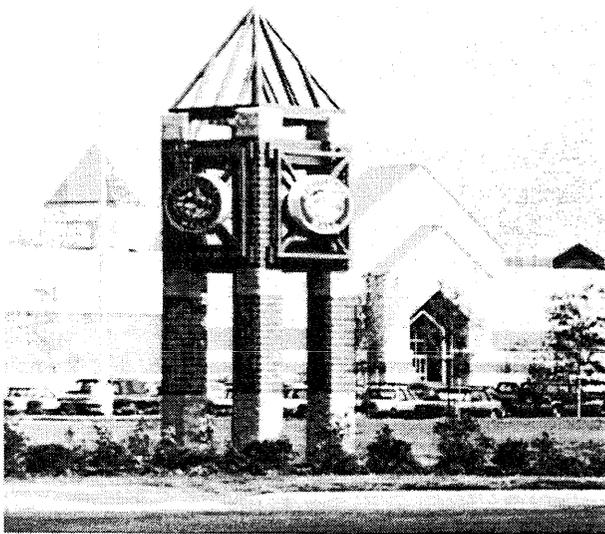


All free-standing and building sign lighting shall be from an indirect or internal source. Indirect lighting shall be from a source hidden from view and internally lit signs shall have an opaque background and translucent letters. All signage shall utilize common letter styles, sizes and colors for an overall comprehensive sign package.

F. Building Features


The City of Concord strives for a unique balance of urban sophistication and New England traditions. These features often include strong vertical elements such as tower forms, cupolas and steeply pitched rooflines which are reflected in existing and new construction.

Typical New England avenues and main street districts often provide inviting shopping areas because of their diverse storefronts and human scale. Smaller town crossroads and market squares are typical gathering places for outside activities. These features can be simulated with courtyards, plazas and other treatments within the Gateway District.

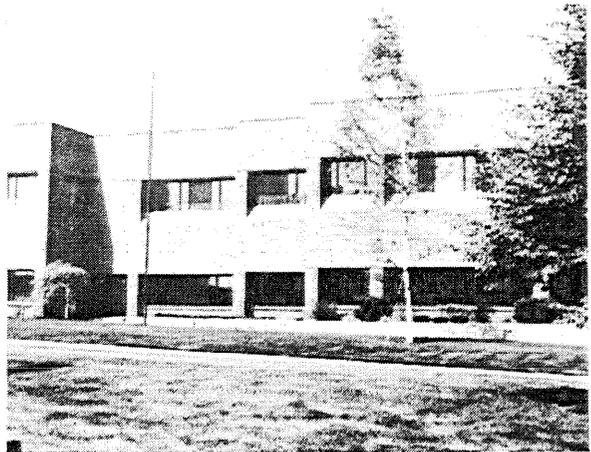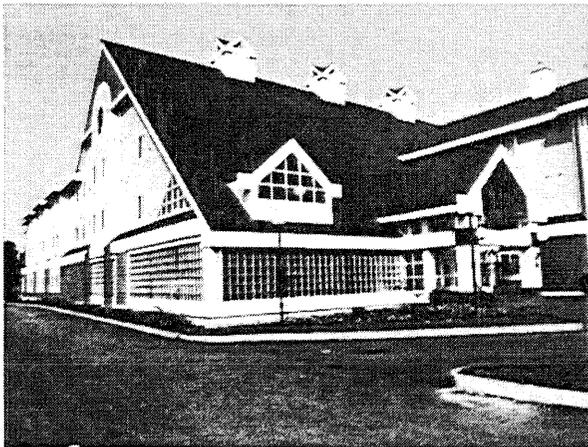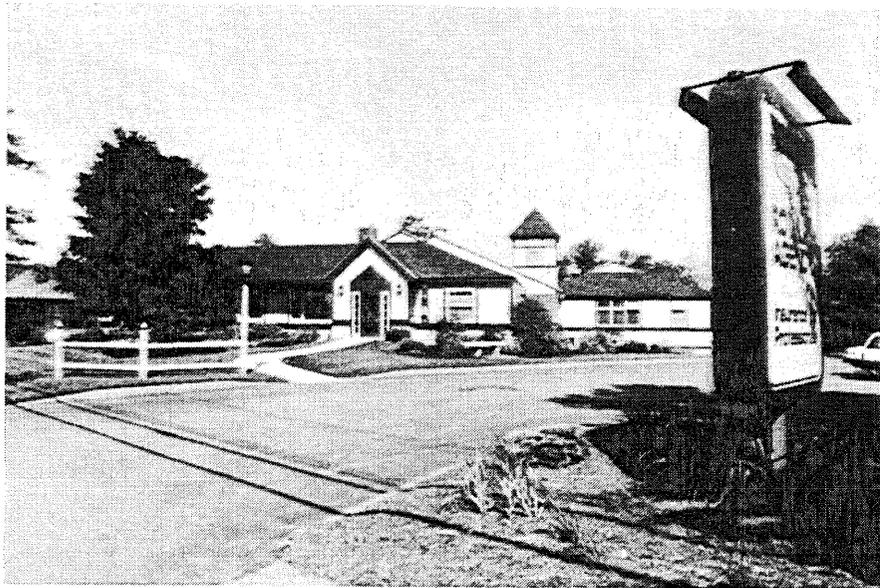


Additional architectural treatment shall be provided for blank building facades which are exposed to public view. The overall building appearance can be enhanced by varying wall setbacks, changing material colors and textures, developing interesting window patterns and using other architectural detailing.

REAR OR SIDE BLANK ELEVATION

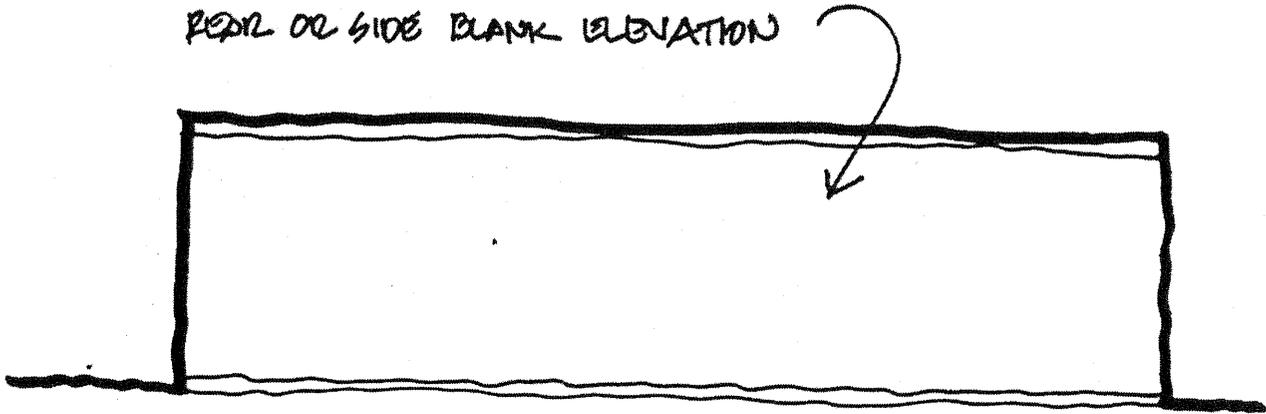

BEFORE :

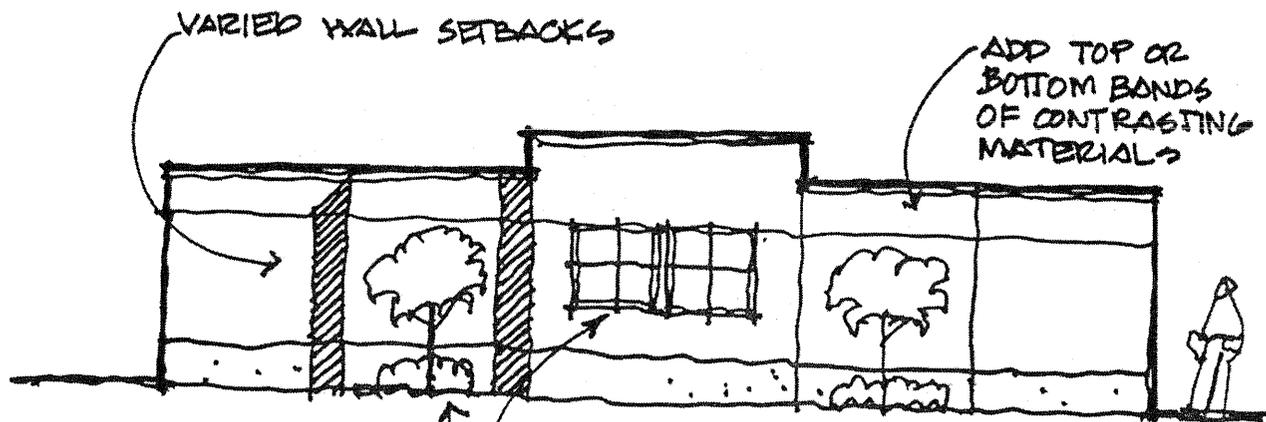

ADD PLANTING GROUPINGS

CREATE WINDOW PATTERNS AND STEPPING OF BUILDING ELEMENTS TO REDUCE BLANK FACE

AFTER :


G. Acceptable Materials

High quality materials will make a strong statement for this special district and maintain consistency with other new developments. The selected materials should contribute to the aesthetics of the project and be durable and easy to maintain.

- Roofs
 - Steeply pitched mansard (if flat), cupolas or towers.
 - Visually screened mechanical equipment
 - Metal, copper or colored standing seam
 - Shingles, asphalt, fiberglass or fire treated wood
- Walls
 - Wood clapboards (stained, painted or vinyl)
 - Red Brick
 - Granite, marble or stone (natural or finished)
 - Fiber-reinforced stucco
- Windows
 - Butt-joint or ribbon glass
 - Multi-paned windows and groupings
 - Etched, beveled, sandblasted or stained glass
- Trim
 - Wood (painted or stained)
 - Anodized aluminum (color or natural)
 - Metal with baked-enamel finish

H. Flags

Landscaped areas and pedestrian walkways may benefit from the use of flags for added color and interest. These elements should comply with other City Ordinances for sizes, locations and types.

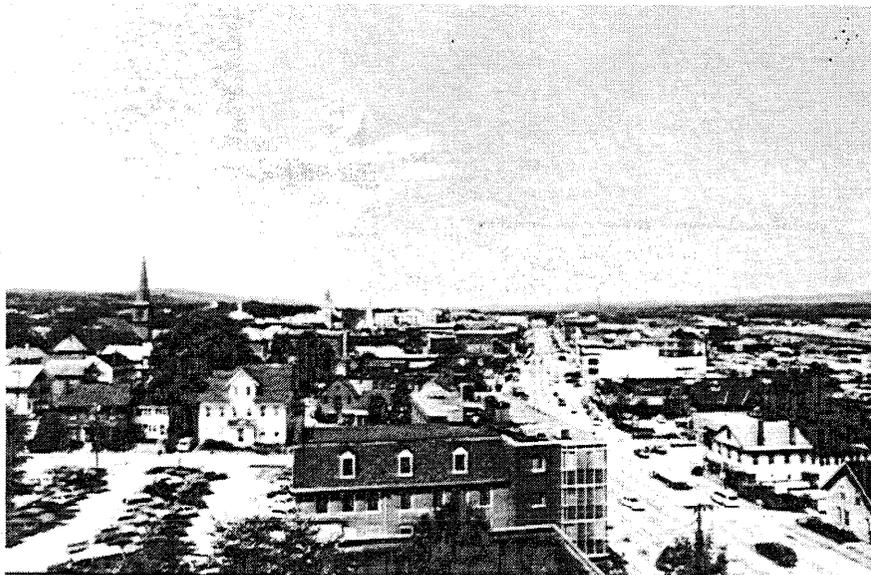


CERTIFICATION

These regulations were amended on April 3, 1991 at a meeting of the City Planning Board after a duly notified Public Hearing and consideration of testimony received. Eight members of the Board were present and voted unanimously in favor of adopting these amended regulations which shall take effect on April 12, 1991.

ATTEST:

City Planning Board
City of Concord,
New Hampshire

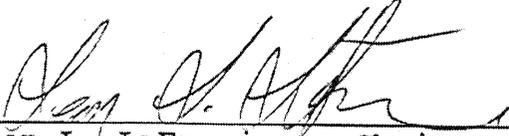


Leon L. LaFreniere, Chair



Gérard Drypolcher, Vice-Chair



Barbara A. Butt, Member

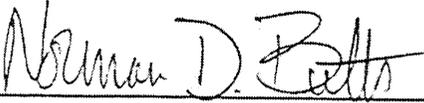

Norman D. Butts, Member




Thomas J. Gatherum, Member



Mark H. Puffer, Alternate Member



James C. Smith, Ex-Officio Member

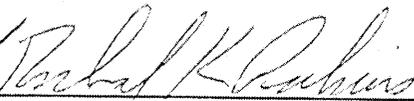

Richard K. Perkins, Ex-Officio Member